


Large LED Temp / RH Logger

Features

•	Wall Mountable Super Large LED Display - easy to Read
•	PC Program IS Available for Setting up Parameters of : Logger Sample Interval, Start / Stop, Date & Time, HI / LO Alarm Threshold, Unit Selection, Memory Points.
•	Recording Function and Monitoring Function Powered by DC: (While in Logging Mode, use only DC Adaptor)
•	Air Temperature or Dew Point (DP) Display and °C/°F Unit display are selectable
•	Features Self-calibration for Humidity by Salt Bottle.
•	Both Visible LEDs & Audible Warning Beeper
•	LEDs' Indication : "REC" LED light flash means under recording mode, "ALM" LED light activate means reading exceeds threshold setting
•	Tripod Mountable Device for Long Time Holding



Model: 8809

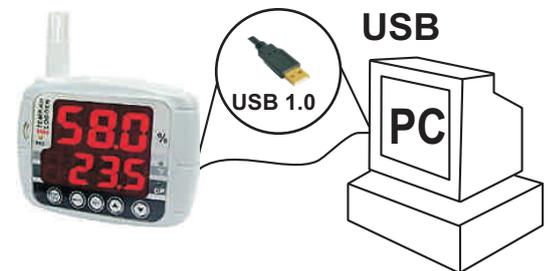

SPECIFICATION

Display	Super Large LCD Size: 50.9 x 65.5mm
Range	Temp. : -20°C to 70°C RH : 0 to 100%
Accuracy Temp.	Temp. : ± 0.6°C (0 to 50°C), others ± 1.2°C
Accuracy Humidity	RH : ± 3% (10 to 90% @ 25°C) others ± 5%
Resolution	Temp. : 0.1°C / °F, RH : 0.1% Point (DP)

Display Style	Upper : RH%, Bottom : Temp. or DP
Memory Points	16000
Power Supply	Battery 4 pcs x AA or DC adaptor
Dimensions	120L x 93W x 42T mm
LED Signal	REC (Alarm) / °F or Dew
Optional Accessories	9 VDC Adaptor Salt Bottle (33% & 75%RH)



HTA INSTRUMENTATION (P) LTD.,

An ISO 9001: 2015 Certified Company & NABL Accredited Calibration Laboratory as per ISO/IEC 17025:2017

Your One Stop For Instrumentation Supply, Automation & Calibration

73, Ramachandra Agrahara, Near T.R. Mills, Chamarajpet, Bangalore - 560018, INDIA.

Phone : 080-26749750, 26759253, 26740681 E-mail : sales@htaip.com Website : www.htaip.com

