

GAS DETECTOR FOR OXYGEN


FEATURES

- SPD201/O₂ is designed for testing oxygen density in places like office, Living Room, Working site, Factory, Train, Car, Cave and mine etc.
- Built-in LCD Backlit ensures readings are legible in dim light condition
- Auto-Temperature Compensation
- Auto Calibration in clean air
- Two-Level (High/Low) Alarming
- Low Battery indication
- Compact and valuable body, easy to carry

SPECIFICATION

Measuring Range	:	0~25% (VOL)
Resolution	:	0.1% (VOL)
Accuracy	:	± 0.5%
Alarming	:	Acousto - optic
Sensor	:	Source cell sensor
Sensor life	:	About 2 Years
Operation Temp	:	-10°C ~ 50°C
Operation Humidity	:	0 ~ 99%RH
Dimensions	:	172 x 51x 26mm
Battery	:	1.5Vx3, AAA size

Equinox™

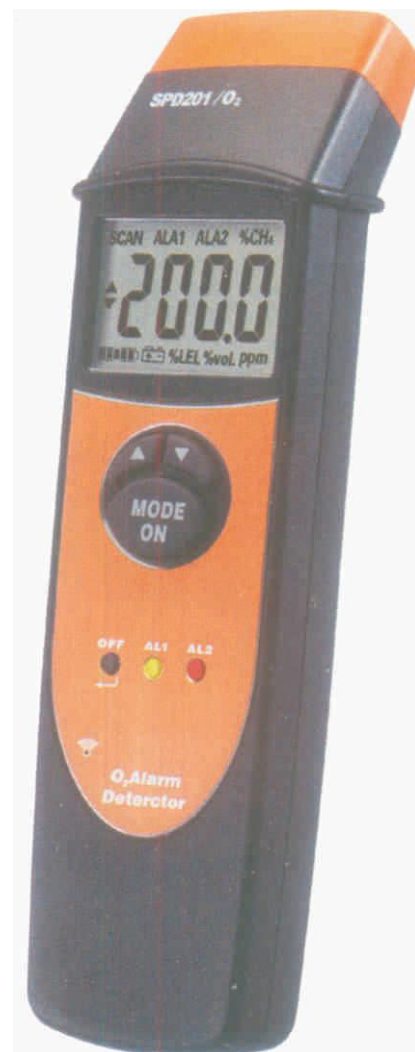

EQ - SPD201 / O₂



HTA INSTRUMENTATION (P) LTD.,

An ISO 9001: 2015 Certified Company & NABL Accredited Calibration Laboratory as per ISO/IEC 17025:2017

Your One Stop For Instrumentation Supply, Automation & Calibration

73, Ramachandra Agrahara, Near T.R. Mills, Chamarajpet, Bangalore - 560018, INDIA.

Phone : 080-26749750, 26759253, 26740681 E-mail : sales@htaipl.com Website : www.htaipl.com

