


Pressure Switch - 48Series



Part Number	Setting Range (in bar)	Tolerance @ 20°C (in bar)	Max Over Pressure limit(in bar)	Max Working Pressure (in bar)
4 8 2 0 H 1 6	50 to 200	2 ÷ 10	900	450
4 8 2 0 H 1 7	200 to 400	4 ÷ 15		

- Case : Zinc plated steel
- Electric contact : Silver Plated
- Regulation Screw : Allen Key 1.5 mm
- Max switches current : 5(1)A / 250 VAC
- Max fluid temperature : 100°C
- Electrical Condition : SPDT
- Mechanical working life : 10⁶ Operations
- Protection degree : IP 65 (Din 43650)
- Hysteresis : 10 to 40% of setting value
- Seal : NBR + Teflon
- Process Connection : ¼" BSP Male, others on request
- Weight : 120 gms.

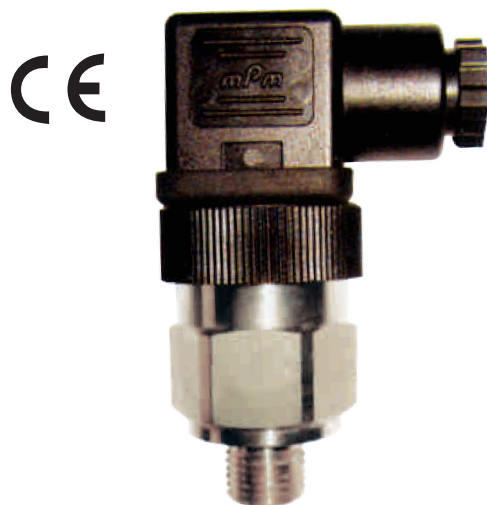

HTA INSTRUMENTATION (P) LTD.,

An ISO 9001: 2015 Certified Company & NABL Accredited Calibration Laboratory as per ISO/IEC 17025:2017

Your One Stop For Instrumentation Supply, Automation & Calibration

73, Ramachandra Agrahara, Near T.R. Mills, Chamarajpet, Bangalore - 560018, INDIA.

Phone : 080-26749750, 26759253, 26740681 E-mail : sales@htaipl.com Website : www.htaipl.com



ISO 9001:2015 CERTIFIED
Certificate No. IQSC202010014