


Pressure Switch - XP110Series

CE

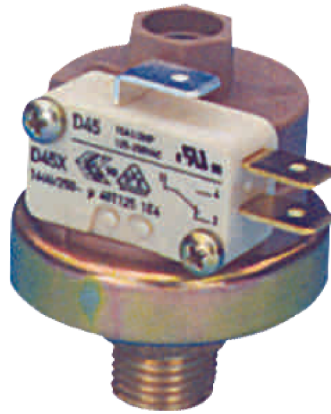

Model Type	Setting Interval	Test Pressure	Fix Differential
XP110	0.2 to 1.2 Bar	4 Bar	0.2 + / - 0.1 bar
	0.5 to 1.5 Bar	4 Bar	0.2 + / - 0.1 bar
	1 to 2.5 Bar	5 Bar	0.25 + / - 0.15 bar
	2 to 6 Bar	8 Bar	0.3 + / - 0.15 bar
	4 to 9 Bar	10 Bar	0.3 + / - 0.15 bar

Specification

- Pressure Connection - brass
- Thread - 1/4" BSP
- Main Body - Techno Polymer
- Membrane and Sealing - AISI316 and silicon
- Protection Degree - IP00
- Adjustment - by screw
- Electric Intervention - SPDT
- Electric Connection - Terminal 6.3 × 0.8
- Admitted Temperature - 125°C
- Burst Pressure - higher than 20 bar
- Thermic Drift - 0.04 bar for 10°C with respect to Temperature of + 20°C



HTA INSTRUMENTATION (P) LTD.,

An ISO 9001: 2015 Certified Company & NABL Accredited Calibration Laboratory as per ISO/IEC 17025:2017

Your One Stop For Instrumentation Supply, Automation & Calibration

73, Ramachandra Agrahara, Near T.R. Mills, Chamarajpet, Bangalore - 560018, INDIA.

Phone : 080-26749750, 26759253, 26740681 E-mail : sales@htaipl.com Website : www.htaipl.com



ISO 9001:2015 CERTIFIED
Certificate No. IQSC202010014