# CER21 Wireless Sensing, Monitoring & Compliant Control Anywhere













LABORATORY /

PHARMACEUTICAL GREEN HOUSE

MOVING TRANSPORT

**WARE HOUSING** 

**COLD CHAIN** 

## Turn Key Monitoring Solution



Measure Temperature



Measure Humidity



**Track Motion** 



Secure Storage on data on Cloud



Setting of Alarms
Possible

### • Features:

You can access data and edit settings of your devices in the Sense Anywhere client portal. Our software and data storage are FDA compliant and is continously being extended with features. In the portal you can

- Manage The Settings of your devices
- Set Alarm Profiles

View Graphs and Data

Schedule and Download Reports & many more

#### **WORKING IN THE SENSE ANYWHERE PORTAL MEANS:**

- No Software Installation
- No need to make back-ups
- No PC / Server needed : access from any smart device.


M	Register+Connect =Ready !	<b>(</b>	Cloud Based	5	No Back-ups
0	Takes less than 10 minutes	<u>A</u>	Security	F	No Maintenance
8	No Cables or software		Accessible from any smart device		Lifetime battery
0	Multiple / Multi Channels can be Viewed		Accessible from anywhere	<u>w</u>	Real-Time data


# Applicable for all kinds of industries


#### **PLANTS & WAREHOUSE**

#### **PHARMACEUTICAL**

#### **MOVING TRANSPORT**

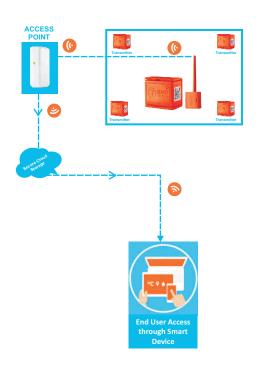

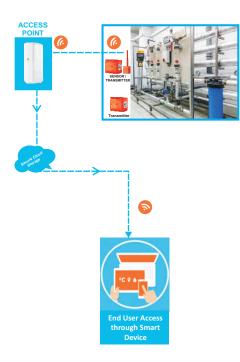

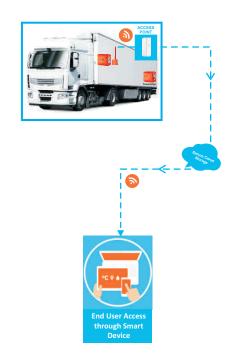

## Technical Specifications

	SENSOR	SENSOR - ER	SENSOR - T	SENSOR -T- ER			
Wireless Protocol	Sense Anywhere wireless protocol with automatic service discovery & seamless roaming						
Range	Anywhere in the world						
Logging capacity	18,500 events with data / time stamp						
Battery Life	Up to 10 years or 1 million messages						
Temp. Range	-30°C to +70°C		-40°C to +70°C				
Temp. Accuracy	±0.5°C (-30°C to -10°C) and ±0.4°C (-10°C to +70°C)		±0.15°C (-40°C to 0°C) and ±0.10°C (0°C to +70°C)				
Humidity Range	0 - 100 % RI	H, non-condensing	NA				
Humidity Accuracy	± 3% RH (0 - 80% RH) ± 4.5% RH (80 -100% RH)		NA				
Compatibility	En12830 CLASS 1, Storage & Transport, Climatic Environment TYPE: D CE, EN300328, EN55022						
Protection Class	IP62		IP67				



## HTA INSTRUMENTATION (P) LTD.,



