

UNIVERSAL PROCESS INDICATOR

With Retransmission output

Equinox™

This is an universal process indicator which accepts Current (mA), Voltage (VDC) & TC / RTD can be configured by using front panel key pad. The unit has double for indication of process value & programming Data. Measuring range is freely configurable and also with decimal point as required.


FEATURES

- Configurable Universal Input-TC / RTD, mA, mV, V
- Measuring Range / Zero Point can be Adjusted
- Large LED Display
- Configurable Decimal Point
- Auxiliary Power Supply of 24VDC
- 2 Relay SPDT Contacts & 4-20mA Retransmission O/P



Model : EQ - DS8B - IRRB

Wiring Diagram

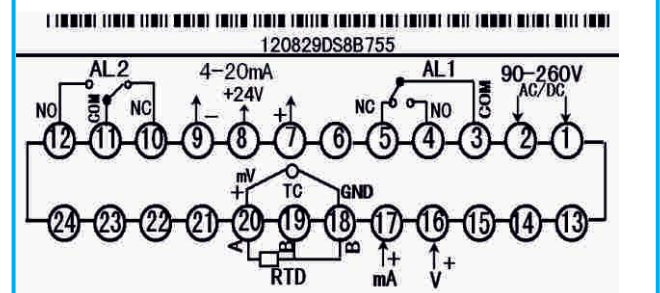

TECHNICAL SPECIFICATION

Display	4 Digit LED
Input	TC / RTD, mA, VDC, mV (Selectable from Front Panel Keys) Current : 0~1 mA, 0~10 mA, 4~20 mA Voltage : 0~5V DC, 0~10V DC, 0~500V DC Millivolts : 0~10 mV, ±100 mV
Accuracy	0.25 % F.S. ± 1 Digit
Sampling Rate	8 times/second
Alarm	2 X 3A / 230VAC Relay SPDT
Auxiliary Power Supply	24VDC
Retransmission output	4~20mA Output , RS485 on request
Power Supply	90-260V AC



HTA INSTRUMENTATION (P) LTD.,

An ISO 9001: 2015 Certified Company & NABL Accredited Calibration Laboratory as per ISO/IEC 17025:2017

Your One Stop For Instrumentation Supply, Automation & Calibration

73, Ramachandra Agrahara, Near T.R. Mills, Chamarajpet, Bangalore - 560018, INDIA.

Phone : 080-26749750, 26759253, 26740681 E-mail : sales@htaip.com Website : www.htaip.com

