

IMMERSION TEMPERATURE SENSOR (with Process Connection)



ORDER CODE

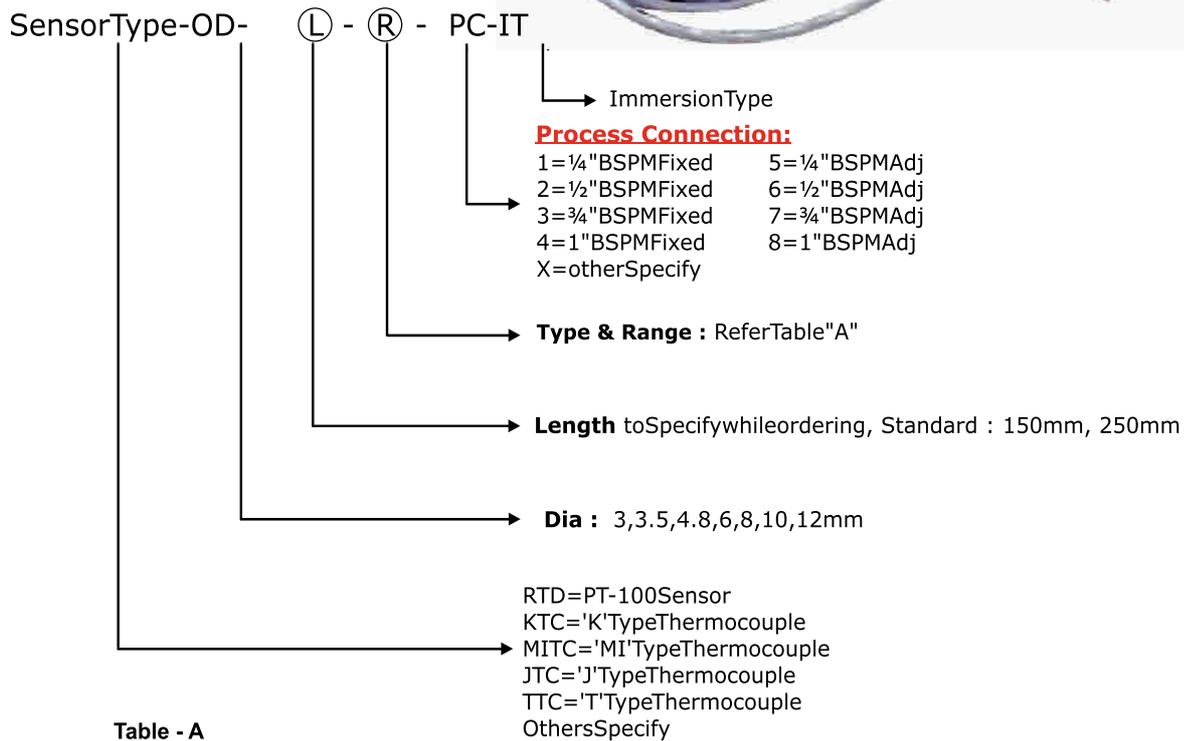


Table - A

Code	Type of T/C	Range	Code	Type of T/C	Range
1	RTD	-50 ~ 200°C	7	K	0 ~ 800°C
2	RTD	-50 ~ 400°C	8	MI - K Type	0 ~ 1100°C
3	RTD	-100 ~ 200°C	9	J	0 ~ 600°C
4	K	-20 ~ 200°C	10	T	50 ~ 200°C
5	K	-20 ~ 400°C	11	T	-50 ~ 400°C
6	K	0 ~ 600°C			

NOTE :

1. Above given Dimensions are in mm.
2. Sheath Material available are SS-304, SS-316, Titanium etc.,
3. Compensating cable need to be ordered separately
4. Cable Types : Teflon / Teflon, Teflon Shielded Teflon, Silicon, SS Braided etc.
5. Required Thermowell need to be ordered separately



HTA INSTRUMENTATION (P) LTD.,

An ISO 9001: 2015 Certified Company & NABL Accredited Calibration Laboratory as per ISO/IEC 17025:2017

Your One Stop For Instrumentation Supply, Automation & Calibration

73, Ramachandra Agrahara, Near T.R. Mills, Chamarajpet, Bangalore - 560018, INDIA.

Phone : 080-26749750, 26759253, 26740681 E-mail : sales@htaipl.com Website : www.htaipl.com

